




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H04J 3/16, H04Q 9/00		A1	(11) International Publication Number: WO 95/12935
			(43) International Publication Date: 11 May 1995 (11.05.95)
(21) International Application Number: PCT/US94/12618		(81) Designated States: AU, BR, CA, CN, FI, JP, KR, NZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 1 November 1994 (01.11.94)			
(30) Priority Data: 08/147,254 1 November 1993 (01.11.93) US 08/332,114 31 October 1994 (31.10.94) US		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON [SE/SE]; S-126 25 Stockholm (SE).			
(71)(72) Applicant and Inventor: DIACHINA, John, Walter [US/US]; 505 Kristin Drive, Garner, NC 27529 (US).			
(72) Inventors: ANDERSSON, Claes, Håns; Transholmsvägen 8, S-178 32 Ekerö (SE). PERSSON, Bengt; Box 42, S-182 05 Djursholm (SE).			
(74) Agent: GRUDZIECKI, Ronald, L.; Burns, Doane, Swecker & Mathis, Washington and Prince Streets, P.O. Box 1404, Alexandria, VA 22313-1404 (US).			

(54) Title: AUTOMATIC RETRANSMISSION REQUEST

(57) Abstract

A method for obtaining a report from a mobile station on the status of frames comprising an entire message transmitted to the mobile station (120) is disclosed. First, a polling request is sent to the mobile station from a base station (110). A status report is then sent to the base station. The polling request specifies whether the mobile station should send the status report on a reservation basis (using a reserved frame) or on a contention basis (using an idle frame). The mobile station then transmits a bit map to the communication system to indicate which frames have been correctly received by the mobile station at the point when it received the polling request.

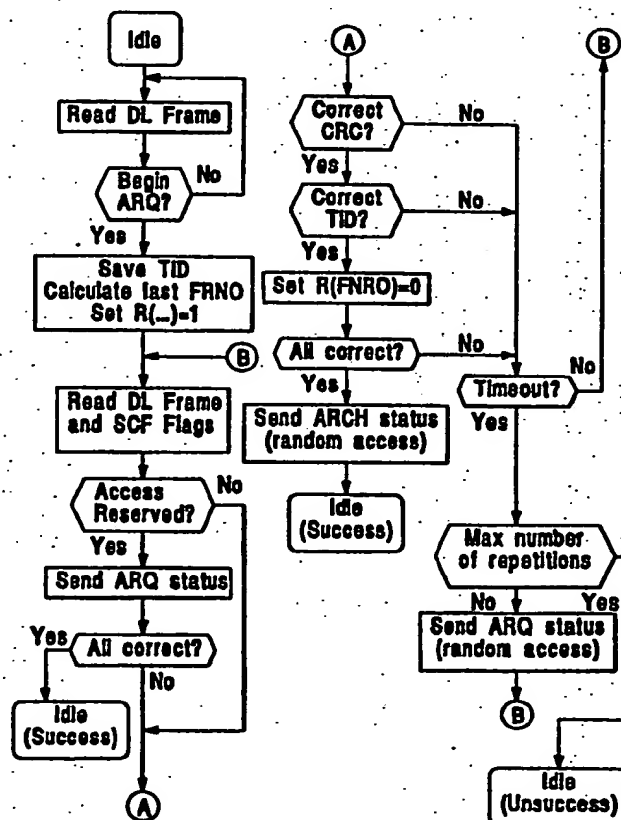

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LV	Latvia	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

-1-

AUTOMATIC RETRANSMISSION REQUEST

The disclosure of U.S. Patent Application No. 08/147,254, entitled "A Method for Communicating in a Wireless Communication System," filed on November 1, 1993, is incorporated in this application by reference.

BACKGROUND

The present invention relates to a method for transmitting messages between mobile stations and a central switching system, and more particularly to transmitting these messages using a more efficient communications link protocol over the air-interface of a cellular telephone system.

In a typical cellular radio system, a geographical area, e.g., a metropolitan area, is divided into several smaller, contiguous radio coverage areas called "cells." The cells are served by a series of fixed radio stations called "base stations." The base stations are connected to and controlled by a mobile services switching center (MSC). The MSC, in turn, is connected to the landline (wireline) public switched telephone network (PSTN). The telephone users (mobile subscribers) in the cellular radio system are provided with portable (hand-held), transportable (hand-carried) or mobile (car-mounted) telephone units (mobile stations) which communicate voice and/or data with the MSC through a nearby base station. The MSC switches calls between and among wireline and mobile subscribers, controls signalling to the mobile stations, compiles billing statistics, and provides for the operation, maintenance and testing of the system.

FIG. 1 illustrates the architecture of a conventional cellular radio system built according to the Advanced Mobile Phone Service (AMPS) standard. In FIG. 1, an arbitrary geographic area may be seen divided into a plurality of contiguous radio coverage areas, or cells, C1-C10. While the system of FIG. 1 is, for illustration purposes, shown to include only ten cells, the number of cells may be much larger in practice. Associated with and located in each of the cells C1-C10 is a base station designated as a corresponding one of a plurality of base stations B1-B10. Each of the base stations B1-B10 includes a plurality of channel units, each

-2-

comprising a transmitter, a receiver and a controller, as is well known in the art.

In FIG. 1, the base stations B1-B10 are located at the center of the cells C1-C10, respectively, and are equipped with omni-directional antennas transmitting equally in all directions. In this case, all the channel units in each of the base stations B1-B10 are connected to one antenna. However, in other configurations of the cellular radio system, the base stations B1-B10 may be located near the periphery, or otherwise away from the centers of the cells C1-C10 and may illuminate the cells C1-C10 with radio signals directionally. For example, the base station may be equipped with three directional antennas, each one covering a 120 degrees sector cell as shown in FIG. 2. In this case, some channel units will be connected to one antenna covering one sector cell, other channel units will be connected to another antenna covering another sector cell, and the remaining channel units will be connected to the remaining antenna covering the remaining sector cell. In FIG. 2, therefore, the base station serves three sector cells. However, it is not always necessary for three sector cells to exist and only one sector cell needs to be used to cover, for example, a road or a highway.

Returning to FIG. 1, each of the base stations B1-B10 is connected by voice and data links to a mobile switching center (MSC) 20 which is, in turn, connected to a central office (not shown) in the public switching telephone network (PSTN), or a similar facility, e.g., an integrated system digital network (ISDN). The relevant connections and transmission modes between the mobile switching center MSC 20 and the base stations B1-B10, or between the mobile switching center MSC 20 and the PSTN or ISDN, are well known to those of ordinary skill in the art and may include twisted wire pairs, coaxial cables, fiber optic cables or microwave radio channels operating in either analog or digital mode. Further, the voice and data links may either be provided by the operator or leased from a telephone company (telco).

With continuing reference to FIG. 1, a plurality of mobile stations M1-M10 may be found within the cells C1-C10. Again, while only ten mobile stations are shown in FIG. 1, the actual number of mobile stations may be much larger in

-3-

practice and will generally exceed the number of base stations. Moreover, while none of the mobile stations M1-M10 may be found in some of the cells C1-C10, the presence or absence of the mobile stations M1-M10 in any particular one of the cells C1-C10 depends on the individual desires of each of the mobile subscribers who
5 may travel from one location in a cell to another or from one cell to an adjacent or neighboring cell.

Each of the mobile stations M1-M10 includes a transmitter, a receiver, a controller and a user interface, e.g., a telephone handset, as is well known in the art. Each of the mobile stations M1-M10 is assigned a mobile identification number
10 (MIN) which, in the United States, is a digital representation of the telephone directory number of the mobile subscriber. The MIN defines the subscription of the mobile subscriber on the radio path and is sent from the mobile station to the MSC 20 at call origination and from the MSC 20 to the mobile station at call termination. Each of the mobile stations M1-M10 is also identified by an electronic serial number
15 (ESN) which is a factory-set, "unchangeable" number designed to protect against the unauthorized use of the mobile station. At call origination, for example, the mobile station will send the ESN to the MSC 20. The MSC 20 will compare the received ESN to a "blacklist" of the ESNs of mobile stations which have been reported to be stolen. If a match is found, the stolen mobile station will be denied access.

20 Each of the cells C1-C10 is allocated a subset of the radio frequency (RF) channels assigned to the entire cellular system by the concerned government authority, e.g., the Federal Communications Commission (FCC) in the United States. Each subset of RF channels is divided into several voice or speech channels which are used to carry voice conversations, and at least one paging/access or
25 control channel which is used to carry supervisory data messages, between each of the base stations B1-B10 and the mobile stations M1-M10 in its coverage area. Each RF channel comprises a duplex channel (bidirectional radio transmission path) between the base station and the mobile station. The RF channel consists of a pair of separate frequencies, one for transmission by the base station (reception by the
30 mobile station) and one for transmission by the mobile station (reception by the base

-4-

station). Each channel unit in the base stations B1-B10 normally operates on a preselected one of the radio channels allocated to the corresponding cell, i.e., the transmitter (TX) and receiver (RX) of the channel unit are tuned to a pair of transmit and receive frequencies, respectively, which does not change. The transceiver (TX/RX) of each mobile station M1-M10, however, may tune to any of the radio channels specified in the system.

In typical land line systems, remote stations and control centers are connected by copper or fiber optic circuits which have a data throughput capacity and performance integrity that is generally significantly better than the data throughput capacity and performance integrity provided by an air interface in a cellular telephone system. As a result, the conciseness of overhead required to manage any selected communication link protocol for land line systems is of secondary importance. In cellular telephone systems, an air interface communications link protocol is required in order to allow a mobile station to communicate with a cellular switching system. A communications link protocol is used to initiate and to receive cellular telephone calls.

The electromagnetic spectrum available for use by cellular telephone systems is limited and is divided into units called channels. Individual channels are used as communication links either on a shared basis or on a dedicated or reserved basis. When individual channels are used as communication links on a shared basis, multiple mobile stations may either listen to or contend for the same channels. In the contending situation, each shared channel can be used by a plurality of mobile stations which compete to obtain exclusive use of the channel for a limited period of time. On the other hand, when individual channels are used as communication links on a dedicated basis, a single mobile station is assigned the exclusive use of the channel for as long as it needs it.

In light of the generally reduced data throughput capacity and performance integrity afforded by an individual channel in a channel sharing situation in a cellular telephone environment, the selection of an efficient air interface protocol to serve as the basis of the communication link becomes paramount.

-5-

The communication link protocol is commonly referred to as a layer 2 protocol within the communications industry and its functionality includes the delimiting or framing of higher level messages. Traditional layer 2 protocol framing mechanisms of bit stuffing and flag characters are commonly used in land line networks today to frame higher layer messages, which are referred to as layer 3 messages. These layer 3 messages may be sent between communicating layer 3 peer entities residing within mobile stations and cellular switching systems.

In cellular systems, the likelihood of successfully sending a message over a radio channel is inversely proportional to the length of the message since the entire message will be considered to be in error even if only a single bit of the transmitted message is received in error. In order to address this problem, messages are first divided into small packets or frames. Thus, it becomes important for the cellular system to know if all of the transmitted packets are correctly received by a mobile station.

15

SUMMARY

According to the present invention, in order to make this determination a base station may send a mobile station any given number of frames using automatic retransmission request (ARQ) wherein the base station may ask the mobile station to send a current status report on the frames it has received and then resend any frames not received correctly. For example, the mobile station can be asked to identify what frames it has received at any point during an ARQ based transmission or the mobile station can autonomously send a message to the base station stating what frames it has received.

According to one embodiment of the present invention, a method for obtaining a report from a mobile station on the status of frames comprising an entire message transmitted to the mobile station is disclosed. First, a polling request is sent to the mobile station from a base station. A status report is then sent to the base station. The polling request specifies whether the mobile station should send the status report on a reservation basis (i.e., using a reserved frame) or on a

-6-

contention basis (i.e., using an idle frame). The mobile station then transmits a bit map to the communication system to indicate which frames have been correctly received by the mobile station at the point in time when it received the polling request.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail with reference to preferred embodiments of the invention, given only by way of example, and illustrated in the accompanying drawings, in which:

Figure 1 illustrates the architecture of a conventional cellular radio system;
10 Figure 2 illustrates a three sector cell which may be used in the system shown in Figure 1;

Figure 3 illustrates a block diagram of an exemplary cellular mobile radio telephone system;

15 Figure 4 illustrates the logical channels which make up the digital control channel according to one embodiment of the present invention;

Figures 5a-b illustrate SPACH Header sections A and B, respectively, according to one embodiment of the present invention;

Figures 6a-b illustrate the Random Access Procedures for a base station and a mobile station according to one embodiment of the present invention;

20 Figures 7a-b illustrate a SPACH ARQ Mode Procedure for a mobile station and a base station according to one embodiment of the present invention;

Figure 8 illustrates an ARQ Mode Begin frame according to one embodiment of the present invention; and

25 Figure 9 illustrates an ARQ Mode Continue frame according to one embodiment of the present invention.

DETAILED DESCRIPTION

Although the description hereinafter focuses on systems which comply with IS-54B and its successors, the principles of the present invention are equally

-7-

applicable to a variety of wireless communication systems, e.g., cellular and satellite radio systems, irrespective of the particular mode of operation (analog, digital, dual-mode, etc.), the access technique (FDMA, TDMA, CDMA, hybrid FDMA/TDMA/CDMA, etc.), or the architecture (macrocells, microcells, picocells, etc.). As will be appreciated by one skilled in the art, the logical channel which carries speech and/or data may be implemented in different ways at the physical layer level. The physical channel may be, for example, a relatively narrow RF band (FDMA), a time slot on a radio frequency (TDMA), a unique code sequence (CDMA), or a combination of the foregoing. For purposes of the present invention, the term "channel" means any physical channel which can carry speech and/or data, and is not limited to any particular mode of operation, access technique or system architecture.

This application contains subject matter which is related to co-pending U.S. Patent Application Serial No. 07/955,591, entitled "Method and Apparatus for Communication Control in a Radiotelephone System," filed on October 2, 1992, to co-pending U.S. Patent Application Serial No. 07/956,640, entitled "Digital Control Channel," filed on October 5, 1992, to co-pending U.S. Patent Application Serial No. 08/047,452, entitled "Layer 2 Protocol for the Random Access Channel and the Access Response Channel," filed on April 19, 1993, to co-pending U.S. Patent Application Serial No. 08/147,254, entitled "A Method For Communicating in a Wireless Communication System," filed on November 1, 1993, to co-pending U.S. Patent Application Serial No. 07/967,027, entitled "Multi-Mode Signal Processing," filed on October 27, 1992, and to co-pending U.S. Patent Application No. 08/140,467, entitled "A Method of Effecting Random Access in a Mobile Radio System," filed on October 25, 1993. These six co-pending applications are incorporated herein by reference.

Figure 3 represents a block diagram of an exemplary cellular mobile radiotelephone system according to one embodiment of the present invention. The system shows an exemplary base station 110 and a mobile station 120. The base station includes a control and processing unit 130 which is connected to the mobile

-8-

switching center MSC 140 which in turn is connected to the public switched telephone network (not illustrated).

5 The base station 110 for a cell includes a plurality of voice channels handled by voice channel receiver 150 which is controlled by the control and processing unit 130. Also, each base station includes a control channel transceiver 160 which may be capable of handling more than one control channel. The control channel transceiver 160 is controlled by the control and processing unit 130. The control channel transceiver 160 broadcasts control information over the control channel of the base station or cell to mobiles locked to that control channel.

10 When the mobile 120 is in an idle mode, the mobile periodically scans the control channels of base stations like base station 110 to determine which cell to lock on or camp to. The mobile 120 receives the absolute and relative information broadcast on a control channel at its voice and control channel transceiver 170. Then, the processing unit 180 evaluates the received control channel information
15 which includes the characteristics of the candidate cells and determines which cell the mobile should lock onto. The received control channel information not only includes absolute information concerning the cell with which it is associated, but also contains relative information concerning other cells proximate to the cell which the control channel is associated.

20 For a better understanding of the structure and operation of the present invention, the digital control channel (DCC) may be divided into three layers: layer 1 (the physical layer), layer 2 and layer 3. The physical layer defines the parameters of the physical communications channel, e.g., RF spacing, modulation characteristics, etc. Layer 2 (L2) defines the techniques necessary for the accurate
25 transmission of information within the constraints of the physical channel, e.g., error correction and detection, etc. Layer 3 (L3) defines the procedures for reception and processing of information transmitted over the physical channel.

30 According to the present invention, the DCC is comprised of the logical channels shown in Figure 4. The DCC logical channels include: the broadcast control channel (BCCH) (which is further comprised of the fast broadcast control

-9-

channel F-BCCH, the extended broadcast control channel E-BCCH, and the short message service broadcast control channel S-BCCH); the SPACH which includes a short message service point to point channel (SMSCH), a paging channel (PCH) and an access response channel (ARCH); and a random access control channel (RACH).

The BCCH acronym is used to refer collectively to the F-BCCH, E-BCCH, and S-BCCH logical channels. These three logical channels are used, in general, to carry generic, system-related information. Some attributes of these three channels are: unidirectional (i.e., downlink), shared, point-to-multipoint (i.e., broadcast), and unacknowledged. The fast BCCH is a logical channel used to broadcast, for example, time critical system information. The extended BCCH is a logical channel used to broadcast, for example, system information that is less time critical than the information sent on the F-BCCH. The short message service BCCH is a logical channel that is used to broadcast, for example, short messages used for the SMS broadcast service.

The SPACH channel is a logical channel that includes the SMSCH, PCH and ARCH and is used to send information to specific mobile stations for SMS point-to-point, paging and access response purposes. The paging channel PCH is a subset of the SPACH used to deliver pages and orders. The access response channel ARCH is a subset of the SPACH to which the mobile station may autonomously move upon successful completion of an access on a random access channel. The ARCH may be used to convey analog voice channel or digital traffic channel assignments or other responses to a mobile access attempt. Layer 2 automatic retransmission requests are possible for the ARCH and SMSCH using acknowledgement frames sent on the RACH. The SMS point-to-point channel SMSCH is used to deliver short messages to a specific mobile station receiving SMS services. The attributes of the SPACH are: unidirectional (downlink) and shared. The PCH is point-to-multipoint and unacknowledged. The ARCH and SMSCH are point-to-point and may be acknowledged or unacknowledged.

The random access channel RACH is used to request access to the system.

-10-

The attributes of this channel are unidirectional (uplink), shared, point-to-point, and acknowledged. Contention resolution and/or collision avoidance information is provided on the forward subchannel corresponding to any given frame sent on the RACH.

5 The SPACH layer 2 protocol can be used whenever a TDMA burst is used to carry point-to-point SMS, Paging, or ARCH information. A single SPACH layer 2 protocol frame can be constructed so as to fit, for example, within a 125 bit envelope. Additional bits (e.g., five) are reserved for use as tail bits resulting in a total of 130 bits of information carried within each slot assigned for SPACH
10 purposes. A summary of the possible SPACH formats is provided in the first table below. A summary of the fields comprising layer 2 protocol frames for SPACH operation is provided in the second table below.

Similar frame formats can be used for the SPACH channels such that the frames will have a common Header A. The contents of the Header A determine
15 whether or not additional information, known as Header B, is present in any given SPACH frame. The Header A discriminates between hard (dedicated) page frames, PCH frames, ARCH frames and SMSCH frames. A Hard Triple Page frame containing three 34-bit mobile station identifications MSIDs can be sent on the PCH (Burst Usage BU = Hard Triple Page). A Hard Quadruple Page frame containing
20 four 20 bit or 24 bit MSIDs can also be sent on the PCH (BU = Hard Quadruple Page).

One or more L3 messages may be transmitted in one frame, or continued over many frames. MSIDs are only carried within frames where BU = Hard Triple Page, Hard Quadruple Page, and ARQ Mode BEGIN in addition to BU = PCH,
25 ARCH and SMSCH where the Burst Type BT may be set to Single MSID, Double MSID, Triple MSID or Quadruple MSID. The mobile station identity type (IDT) field identifies the format of all MSIDs carried within a given SPACH frame (i.e., no mixing of MSID formats is allowed). Pages carried on the PCH are not allowed to continue beyond a single SPACH frame (even though the protocol allows for it).
30 All other PCH messages may continue beyond a single SPACH frame.

-11-

For non ARQ mode operation, the L2 SPACH protocol supports sending a single L3 message to multiple MSIDs in addition to the fixed one-to-one relationship between MSIDs and L3 messages. The Message Mapping field (MM) is used to control this aspect of the layer 2 frame operation. A valid SPACH frame requires that all L2 header information pertinent to a given L2 frame be included entirely within that frame, i.e., L2 header from a given SPACH frame cannot wrap into another SPACH frame. The Offset Indicator field (OI) is used to allow both the completion of a previously started layer 3 message and the start of a new layer 3 message to occur within a single SPACH frame.

The following table summarizes possible SPACH formats:

	SMS	PCH	ARCH	CAN BE CONTINUED
Single MSID	Y	Y	Y	Y
Double MSID	N	Y	Y	Y
Triple MSID	N	Y	Y	Y
Quadruple MSID	N	Y	Y	Y
Hard Triple Page (MIN)	N	Y	N	N
Hard Quadruple Page (TMSI)	N	Y	N	N
Continue	Y	Y	Y	Y
ARQ Mode BEGIN	Y	N	Y	Y
ARQ Mode CONTINUE	Y	N	Y	Y

Figure 5a illustrates the SPACH Header A according to one embodiment of the present invention. The SPACH Header A contains burst usage information and flags for managing mobile stations in a sleep mode. The BU field provides a high level indication of burst usage. According to the present invention, the operation performed on each SPACH channel is not predetermined. The BU field indicates whether the burst is being used for paging, access response, or short message services. The flags indicate changes in sleep mode configuration as well as

-12-

- 5 broadcast control channel information. This header can be present in all possible SPACH frame types. Figure 5b illustrates the SPACH Header B according to one embodiment of the present invention. The SPACH Header B contains supplementary header information used to identify the remaining content of the layer 2 frame. This header is present when Header A indicates a burst usage of type PCH, ARCH or SMSCH.

The following table summarizes the SPACH Layer 2 Protocol fields:

Field Name	Length (bits)	Values
10 BU = Burst Usage	3	000 = Hard Triple Page (34 bit MSID) 001 = Hard Quad Page (20 or 24 bit MSID) 010 = PCH Burst 011 = ARCH Burst 100 = SMSCH Burst 101 = Reserved 110 = Reserved 111 = Null
PCON = PCH Continuation	1	0 = No PCH Continuation 1 = PCH Continuation, Activated
BCN = BCCH Change Notification	1	Transitions whenever there is a change in F-BCCH information.
SMSN = SMS Notification	1	Transitions whenever there is a change in S-BCCH information.
PFM = Paging Frame Modifier	1	0 = Use assigned PF 1 = Use one higher than assigned PF
15 BT = Burst Type	3	000 = Single MSID Frame 001 = Double MSID Frame 010 = Triple MSID Frame 011 = Quadruple MSID Frame 100 = Continue Frame 101 = ARQ Mode Begin 110 = ARQ Mode Continue 111 = Reserved
IDT = Identity Type	2	00 = 20 bit TMSI 01 = 24 bit MINI per IS-54B 10 = 34 bit MIN per IS-54B 11 = 50 bit IMSI

-13-

MSID = Mobile Station Identity	20/24/34/50	20 bit TMSI 24 bit MINI 34 bit MIN 50 bit IMSI
MM = Message Mapping	1	0 = One instance of L3LI and L3DATA per instance of MSID. 1 = One instance of L3LI and L3DATA for multiple MSIDs.
OI = Offset Indicator	1	0 = No message offset included. 1 = Message offset included.
CLI = Continuation Length Indicator	7	Number of bits remaining in the previous L3 message.
L3LI = Layer 3 Length Indicator	8	Variable length layer 3 messages supported up to a maximum of 255 octets.
L3DATA = Layer 3 Data	Variable	Contains a portion (some or all) of the layer 3 message having an overall length as indicated by L3LI. The portion of this field not used to carry layer 3 information is filled with zeros.
PE = Partial Echo	7	The 7 least significant bits of the mobile station IS-54B MIN.
TID = Transaction Identity	2	Indicates which ARQ mode transaction is being transmitted on the ARCH or SMSCH.
FRNO = Frame Number	5	Uniquely identifies specific frames sent in support of an ARQ mode transaction.
FILLER = Burst Filler	Variable	All filler bits are set zero.
CRC = Cyclic Redundancy Code	16	Same Generator polynomial as IS-54B (includes DVCC)

According to the present invention, a mobile station (MS) can be in a plurality of states. A mobile station shall be in the "start random access" state before the first unit of a message that is to be transmitted by a random access has been transmitted. The mobile station shall be in the "start reserved access" state before the first unit of a message that is to be transmitted by a reservation based access has been transmitted. The mobile station shall be in the "more units" state if there are more units associated with the current access event yet to be transmitted. The mobile station shall be in the "after last burst" state if the last unit of an access

-14-

event has been transmitted. Finally, the mobile station shall be in the "success" state after a complete message has been sent successfully.

5 The layer 2 protocol also contains a plurality of flags. Forward shared control feedback (SCF) flags are used to control transmissions on the RACH. A busy/reserved/idle (BRI) flag is used to indicate whether its corresponding uplink RACH slot is Busy, Reserved or Idle. Six bits are used for these flags and the different conditions are encoded as shown in the table below:

	BRI ₅	BRI ₄	BRI ₃	BRI ₂	BRI ₁	BRI ₀
Busy	1	1	1	1	0	0
Reserved	0	0	1	1	1	1
10 Idle	0	0	0	0	0	0

A received/not received (R/N) flag is used to indicate whether or not the base station received the last transmitted burst. A five times repetition code is used for encoding this flag as shown in the table below:

	R/N ₄	R/N ₃	R/N ₂	R/N ₁	R/N ₀
Received	1	1	1	1	1
15 Not Received	0	0	0	0	0

According to the present invention, partial echo (PE) information is used to identify which MS was correctly received after the initial burst of random access has been sent or which MS is intended to have access to a reserved RACH slot. For example, the seven least significant bits LSBs of an IS-54B MIN can be used as partial echo information.

20

-15-

The following table shows how a mobile station decodes received flags according to its Layer 2 state. Note that only the flags relevant to its Layer 2 state are shown. In the "Start random access" state, the BRI flag is the only relevant flag. During a multiburst message transmission both the BRI and R/N flags are relevant. In the summations in the following table, b_i equals the bit value.

Layer 2 State	Busy/Reserved/Idle			Received/Not Received	
	Busy	Reserved	Idle	Received	Not received
	111100	001111	000000	11111	00000
Start random access	Idle IF $\sum_{i=1}^4 b_i < 2$ AND $\sum_{i=3}^6 b_i < 2$			N/A	N/A
Start reserved access	Reserved IF < 3 bits difference to Reserved flag code value			N/A	N/A
More units	Busy IF < 4 bits difference to Busy flag code value			$\sum_{i=1}^5 b_i \geq 4$	$\sum_{i=1}^5 b_i < 4$
After last burst	Busy IF < 4 bits difference to Busy flag code value			$\sum_{i=1}^5 b_i \geq 4$	$\sum_{i=1}^5 b_i < 4$

The mobile station interprets a received coded partial echo (CPE) value as having been correctly decoded if it differs by less than 3 bits from the correctly coded partial echo. This is referred to as PE match.

A mobile station is allowed a maximum of $Y+1$, where $Y=(0..7)$, access attempts before considering the attempt to transfer a message as a failure. The random delay period used by a mobile station after not finding BRI=Idle when ready to send the first burst of an access attempt or after a transmission attempt failure, is uniformly distributed between 0 and 200 ms with a granularity of 6.667

-16-

ms (the length of a time slot). A mobile station is not allowed to make more than Z , where $Z=(0..3)$, consecutive repetitions of an individual burst during an access attempt.

When a mobile station is in the start "random access" state, it looks at BRI
5 information in the first occurrence of a downlink DCC slot, regardless of the sub
channels of the current DCC. If the mobile station finds $BRI=Idle$, it sends the
first burst unit of its message in the corresponding sub channel uplink RACH. If
 $BRI=Busy$ or $Reserved$, the mobile station generates a random delay time. After
the random delay time has expired the mobile shall repeat the foregoing procedure.
10 The search for $BRI=Idle$ is to be repeated a maximum of $X+1$ times, where
 $X=(0..9)$, for each transmission attempt. With the exception of an origination, the
MS still monitors its PCH during random access procedures.

When a mobile station is in the "start reserved access" state, it looks at BRI
and PE information in all downlink slots of the current DCC, regardless of
15 subchannels, for a slot where $BRI=Reserved$ and a PE match occurs, which will be
explained below. The base station (BS) can assign a reserved slot for a given
mobile station MS regardless of which subchannel the MS may have previously
used. If a mobile station finds this slot, it sends the first unit of its message in the
corresponding uplink RACH subchannel. If the mobile station does not find this
20 slot within a predetermined time-out period (T), it enters the "start random access"
state. After the first burst of a random access has been transmitted, the mobile
reads the partial echo field in the next downlink slot of the current DCC that
corresponds to its RACH subchannel. If a PE match is found and $R/N=1$, the
mobile assumes that the first burst of its access attempt has been correctly received
25 by the BS and then enters either the "after last burst" state or the "more units" state.
If the mobile does not find a PE match, it generates a random delay time and enters
the "start random access" state.

If the mobile station has additional bursts to send, it enters the "move units"
state and then checks R/N after sending each of these bursts. If the mobile station
30 finds that $R/N=Received$ after sending a burst, it considers that burst as correctly

-17-

received by the BS; otherwise, it considers the burst as not received by the BS. If the mobile station finds that BRI=reserved or idle, it also considers the burst as not received by the BS. If more than $S+1$, where $S=(0,1)$, consecutive Not Busy readings of BRI are made by the mobile, it aborts the transmission of the message and starts another transmission attempt after a random delay. If a given burst is considered to be received, the mobile transmits the next burst of the message in the next slot of the subchannel. If a burst is found to be not received, the mobile re-transmits it.

The mobile reads the SCF flags of the currently used subchannel after it has transmitted the last burst of its current access attempt. If R/N = Received, the MS considers the message to have been correctly transmitted. If R/N = Not Received and BRI = Reserved or Idle, the MS considers the last burst as not received. If more than $S+1$, where $S=(0,1)$, consecutive combined R/N=Not Received and BRI=Not Busy readings are made by the mobile station, it aborts the transmission of the message and starts another transmission attempt after a random delay. If R/N=Not Received and BRI=Busy, the mobile re-transmits the last transmitted burst.

The foregoing random access procedures are illustrated in Figures 6a-b. Figure 6a illustrates the random access procedure for a mobile station while Figure 6b illustrates the random access procedure for a base station. Set forth below is an itemized description of the use of the truth table in the flow chart shown in Figure 6a:

1. The truth table is examined at start of a contention based access at block 10. If BRI = "Reserved" or "Busy" the mobile station shall increment the Busy/Idle counter and then compare it to X. If BRI = "Idle" the mobile station shall set Unit_ctr to 1 and send the first burst of its access attempt.
2. The truth table is examined after sending any given intermediate burst of an access attempt with at least one more burst pending at block 20. If BRI = "Idle" or "Reserved" the mobile station shall

-18-

increment Stop_ctr and PB_ctr and then compare Stop_ctr to S. If BRI = "Busy" and R/N = "Not Received" the mobile station shall increment PB_ctr and then compare it to Z. If BRI = "Busy" and R/N = "Received" the mobile station shall increment Unit_ctr and set PB_ctr to zero.

3. The truth table is examined after sending the last burst of an access attempt at block 30. If R/N = "Received" then the mobile station shall consider the message as successfully sent. If BRI = "Reserved" and R/N = "Not Received" the mobile station shall increment Stop_ctr and PB_ctr and then compare Stop_ctr to S. If BRI = "Busy" and R/N = "Not Received" the mobile station shall resend the last burst of the access attempt.

4. The truth table is examined at the start of a reservation based access at block 40. If BRI = "Busy" or "Idle" then the mobile station examines the reservation timer. If BRI = "Reserved" and the PE does not match then the mobile station examines the reservation timer. If BRI = "Reserved" and the PE does match then the mobile station shall set Unit_ctr to 1 and send the first burst of the access attempt.

According to one embodiment of the present invention, a unique method for determining the status of frames sent to a mobile station is disclosed and is illustrated in Figures 7a-b. The BMI (base station, mobile telephone service center and internetworking function) starts an Automatic Retransmission Request (ARQ) mode transaction by sending an ARQ Mode BEGIN frame which is illustrated in Figure 8. The ARQ Mode BEGIN frame is used to start the delivery of a L3 ARCH or SMSCH message in the ARQ mode. If the L3 message is too long to fit into a single ARQ Mode BEGIN frame, then the remaining L3 information is carried using additional ARQ Mode CONTINUE frames as necessary. If the L3 message does fit within a single ARQ Mode BEGIN frame, it is padded with filler as necessary. The ARQ Mode Begin frame contains a Header A and a Header B

-19-

which in turn contain various layer 2 overhead information. In this example, the Header A section has identified this frame as a point-to-point SMS channel, however the present invention is not limited thereto. The ARQ Mode BEGIN frame contains a Mobile station identity (MSID) and a Partial Echo (PE) field which is set to some value, for example, the 7 least significant bits of the mobile station's IS-54B mobile identification number (MIN). A transaction identifier (TID) field is included and uniquely identifies which instance of an ARQ mode transaction is being sent to a mobile station. The PE field in conjunction with the transaction identifier TID identifies the transaction initiated by the ARQ Mode BEGIN frame and serves to associate any subsequent ARQ Mode CONTINUE frames with the same transaction. A L3 length indicator (L3LI) field is used by the mobile station to calculate the number of ARQ Mode CONTINUE frames which will follow the ARQ Mode BEGIN frame. Finally, the ARQ Mode Begin frame contains a layer 3 data field (L3DATA).

As a result of sending an ARQ Mode BEGIN frame, the BMI may wait for an acknowledgment from the mobile station since this frame contains information pertaining to the potential success of an ARQ Mode transaction. If the BMI decides not to wait for a mobile station acknowledgment, it shall proceed to send an ARQ Mode CONTINUE frame which will be described below. However if the BMI decides to wait for an acknowledgement, the BMI shall proceed as follows. For the case of soliciting a reservation based acknowledgement in a given downlink slot, the BMI polls the mobile station by setting the BRI flag (part of the SCF) to "Reserved" and by setting the PE field (part of the SCF) to the value corresponding to the target mobile station. The BMI then waits for an uplink ARQ Status frame on the same access path on which it polled the mobile station. If an ARQ Status message is not received on the reserved access slot or is received but with an incorrect indication of outstanding frames, the BMI shall resend the ARQ Mode BEGIN frame up to a predetermined number of times. If the BMI does not receive a correct ARQ Status message after a certain number of attempts, it shall terminate the ARQ Mode transaction. If the BMI does receive a correct ARQ Status frame after a certain

-20-

number of attempts, it shall proceed to send an ARQ Mode CONTINUE frame.

The BMI sends as many ARQ Mode CONTINUE frames as necessary to complete the initiated ARQ Mode transaction. The ARQ Mode CONTINUE frame, which is illustrated in Figure 9, contains the Partial Echo (PE) field and a transaction identifier (TID) which together uniquely identify which instance of an ARQ mode transaction is being sent to the mobile station. The ARQ Mode CONTINUE frame also includes a Continuation Frame Number (FRNO) field which identifies individual continuation frames, and a portion of the L3 data (L3DATA). An ARQ Mode BEGIN frame has an implicit frame number FRNO value of 0 associated with it whereas ARQ Mode CONTINUE frames have explicit FRNO values which start at 1 and range from 1 to 31. The FRNO value is incremented for each new ARQ Mode CONTINUE frame sent by the BMI to a MS in support of a specific ARQ Mode transaction.

The BMI may poll the mobile station while sending any intermediate ARQ Mode CONTINUE frame. If the BMI decides to issue an intermediate poll it shall proceed as follows. In a given downlink slot the BMI sets the BRI flag to "Reserved" and sets the PE field to the value corresponding to the target mobile station. The BMI then waits for an uplink ARQ Status message on the same access path on which it polled the mobile station. If an ARQ Status message is not received on the reserved access slot, the BMI resends the current ARQ Mode CONTINUE frame up to a predetermined number of times. If the BMI does not receive a correct ARQ Status frame after a certain number of attempts, the BMI terminates the ARQ Mode transaction. If the BMI does receive a correct ARQ Status frame after a certain number of attempts, it continues to send ARQ Mode CONTINUE frames that have not yet been correctly received by the mobile station. When the BMI sends the last ARQ Mode CONTINUE frame, the BMI proceeds in a manner described below.

The BMI polls the mobile station while sending the last ARQ Mode CONTINUE frame as follows. For the case of soliciting a reservation based acknowledgement in a given downlink slot, the BMI sets the BRI flag to "reserved"

-21-

and sets the PE field to the value corresponding to the target mobile station. The BMI then waits for an uplink ARQ Status frame on the same access path on which it polled the mobile station. If an ARQ Status frame is not received on the reserved access slot, the BMI resends the current ARQ Mode CONTINUE frame up to a predetermined number of times. If the BMI does not receive a correct ARQ Status frame after a certain number of attempts, the BMI terminates the ARQ Mode transaction. If the BMI does receive an ARQ Status frame and the FRNO MAP indicates "all correct", the ARQ Mode transaction is considered to be successfully completed. If the BMI does receive an ARQ Status frame and the FRNO MAP does not indicate "all correct", the BMI resends those ARQ Mode CONTINUE frames that have not yet been correctly received by the mobile station. The BMI resends any given ARQ Mode CONTINUE frame up to a predetermined maximum number of times before terminating the ARQ Mode transaction.

The operation of the SPACH ARQ mode for the mobile station will now be described. After a mobile station has successfully completed transmission of a message on the RACH (as indicated by the SCF flags), it reads up to a predetermined number of SPACH frames beginning 40ms after successfully completing the RACH message transmission. When the mobile station receives an ARQ Mode BEGIN frame with a MSID matching its own, it proceeds as follows.

The mobile station stores the TID for ARQ Mode transaction identification purposes. The number of pending ARQ Mode CONTINUE frames can then be calculated based on the received L3LI. The FRNO MAP, which is a bit map, is set to RECEIVED for FRNO zero (corresponding to the ARQ Mode BEGIN) and NOT RECEIVED for all pending ARQ Mode CONTINUE frames. According to one embodiment of the present invention, a 1 can be used to signify that a frame has been received and a 0 can be used to signify that a frame has not been received. The FRNO MAP supports BMI transmissions up to 32 ARQ Mode frames in length (1 BEGIN frame and 31 CONTINUE frames). The portion of the L3 message carried in L3DATA shall be stored. The mobile station then proceeds as described in the next section. Of course those skilled in the art will readily appreciate that the

-22-

FRNO bit map could be expanded or reduced so as to support a greater or fewer number of frames transmitted from the BMI.

The mobile station shall read SPACH frames and respond as follows. If a poll occurs, i.e., a PE match occurs along with the BRI flag set to "Reserved", the mobile station sends an ARQ Status frame to the BMI with a FRNO MAP that indicates the reception status of all ARQ frames correctly received to that point of the current ARQ mode transaction. If the FRNO MAP indicates that an "all correct" condition exists, the mobile station considers the corresponding ARQ Mode transaction to be successfully completed. Otherwise, if an ARQ Mode CONTINUE frame is correctly received for an outstanding ARQ Mode transaction (i.e., PE and TID sent in the ARQ Mode CONTINUE frame match) the mobile station stores the L3DATA contained therein and sets the corresponding FRNO MAP position to RECEIVED. If no ARQ Mode CONTINUE frame or poll is received for a predetermined period, the mobile station can autonomously transmit an ARQ Status frame using a contention based random access. A maximum number of such autonomous ARQ Status frame transmissions may be sent before the corresponding ARQ Mode transaction is terminated.

While a particular embodiment of the present invention has been described and illustrated, it should be understood that the invention is not limited thereto since modifications may be made by persons skilled in the art. The present application contemplates any and all modifications that fall within the spirit and scope of the underlying invention disclosed and claimed herein.

-23-

We claim:

1. A method for obtaining a report on the status of frames comprising a message transmitted to a remote station, comprising the steps of:
sending a polling request to said remote station from a base station; and
5 sending a status report to said base station, wherein said polling request specifies whether the remote station should send the status report on a reservation basis or on a contention basis.
2. A method according to claim 1, wherein said polling request uses
10 layer 1 bits to indicate whether said status report should be sent on a reservation basis or contention basis.
3. A method according to claim 2, wherein said layer 1 bit is the Busy/Reserved/Idle portion of the shared channel feedback.
4. A method for obtaining a report on the status of frames comprising
15 a message transmitted from a cellular communication system to a remote station, comprising the steps of:
sending a polling request to said remote station;
transmitting a bit map from said mobile station to a base station, wherein
said bit map indicates which of a plurality of frames have been correctly received
by said remote station.
- 20 5. A method according to claim 4, wherein said bit map indicates whether or not the remote station has correctly received up to 32 frames.
6. A method according to claim 1, wherein said polling request uses
layer 1 bits to identify said remote station to which said polling request is being
sent.

-24-

7. A method according to claim 6, wherein said layer 1 bits are a partial echo (PE) portion of shared channel feedback.

8. A method for determining ownership of ARQ Mode BEGIN and CONTINUE frames, comprising the steps of:

5 receiving, at a remote station, an ARQ Mode BEGIN frame with an identifier associated with said remote station and storing a partial echo and transaction identifier contained in the ARQ Mode BEGIN frame; and

receiving, at said remote station, at least one subsequent ARQ Mode CONTINUE frame having partial echo and transaction identifier values that match
10 the stored values.

9. A method for communicating in a radiocommunication system comprising the steps of:

receiving, at a remote station, a partially completed ARQ Mode transaction;
and

15 generating an ARQ Status frame after a period of time during which said remote station received no polling request of ARQ Mode CONTINUE frames from a base station for a current ARQ mode transaction.

10. A method for communicating in a radiocommunication system comprising the step of:

20 sending, from a base station, a polling request using shared channel feedback bits coincidental with an ARQ Mode BEGIN or an ARQ Mode CONTINUE frame.

11. A method for communicating in a radiocommunication system comprising the step of:

25 sending, from a remote station, a polling request using shared channel feedback bits which are time independent of an ARQ Mode BEGIN or an ARQ

-25-

CONTINUE frame.

12. A method for communicating in a radiocommunication system comprising the step of:

- 5 assigning a partial echo value to a remote station within an ARQ Mode BEGIN frame; and
transmitting frames including said partial echo value for a duration of that ARQ Mode transaction.

13. A method for communicating in a radiocommunication system comprising the step of:

- 10 assigning a partial echo value to a remote station within an ARQ Mode BEGIN frame; and
considering subsequent partial echo values to match said assigned partial echo value if said subsequent partial echo values differ from said assigned partial echo value by a predetermined number of bits.

15 14. A base station for use in a cellular communication system, comprising:

- means for transmitting a polling request to a mobile station;
means for receiving a status report from said mobile station in response to said polling request, wherein said polling request specifies whether the mobile
20 station should send the status report on a reservation basis or on a contention basis.

15. A base station according to claim 13, wherein said polling request uses layer 1 bits to indicate whether said status report should be sent on a reservation basis or contention basis.

25 16. A base station according to claim 14, wherein said layer 1 bit is a busy reserved idle portion of shared channel feedback.

-26-

17. A base station for use in a cellular communication system, comprising:

means for transmitting a polling request to a mobile station;

5 means for receiving a bit map from said mobile station in response to said polling request;

means for interpreting said bit map to determine which of a plurality of frames have been correctly received by said mobile station when the polling request was received.

10 18. A base station according to claim 16, wherein said bit map indicates whether the mobile station has correctly received up to 32 frames.

19. A base station according to claim 13, wherein said polling request uses layer 1 bits to indicate which mobile station is being sent a polling request.

20. A base station according to claim 18, wherein said layer 1 bits are a partial echo portion of shared channel feedback.

15 21. A base station according to claim 16, wherein said polling request uses layer 1 bits to indicate which mobile station is being sent a polling request.

22. A base station according to claim 20, wherein said layer 1 bits are a partial echo portion of shared channel feedback.

20 23. A mobile station for use in a cellular communication system, comprising:

means for receiving a polling request from said cellular system;

means for transmitting a status report to said cellular system in response to said polling request, wherein said polling request specifies whether the mobile station should send the status report on a reservation basis or on a contention basis.

-27-

24. A mobile station according to claim 22, wherein said polling request uses layer 1 bits to indicate whether said status report should be sent on a reservation basis or contention basis.

25. A mobile station according to claim 23, wherein said layer 1 bit is a busy reserved idle portion of shared channel feedback.

26. A mobile station according to claim 22, wherein said mobile station transmits said status report to a base station in said cellular system.

27. A mobile station according to claim 22, wherein said polling request includes layer 1 bits to indicate which mobile station is being sent a polling request.

28. A mobile station according to claim 26, wherein said layer 1 bits are a partial echo portion of shared channel feedback.

29. A mobile station for use in a cellular communication system, comprising:

means for receiving a polling request from said cellular system;
means for forming a bit map which indicates which of a plurality of frames have been correctly received by said mobile station when the polling request was received;

means for transmitting said bit map to said cellular system.

30. A mobile station according to claim 28, wherein said bit map indicates whether the mobile station has correctly received up to 32 frames.

31. A mobile station according to claim 28, wherein said polling request uses layer 1 bits to indicate which mobile station is being sent a polling request.

-28-

32. A mobile station according to claim 30, wherein said layer 1 bits are a partial echo portion of shared channel feedback.

33. A mobile station according to claim 28, wherein said mobile station transmits said bit map to a base station in said cellular system.

5 34. A method for identifying to which mobile station a plurality of linked frames are being sent to in a cellular communication system, comprising the steps of:

receiving a begin frame at a mobile station;
comparing said mobile station's mobile station identification with a mobile
10 station identification in said begin frame;
storing a partial echo and transaction identifies values contained in said begin frame with a matching mobile station identification;
receiving at least one combination frame, wherein said frame contains partial echo and transaction identifies values that match the stored values.

1/9

Fig. 1
PRIOR ART


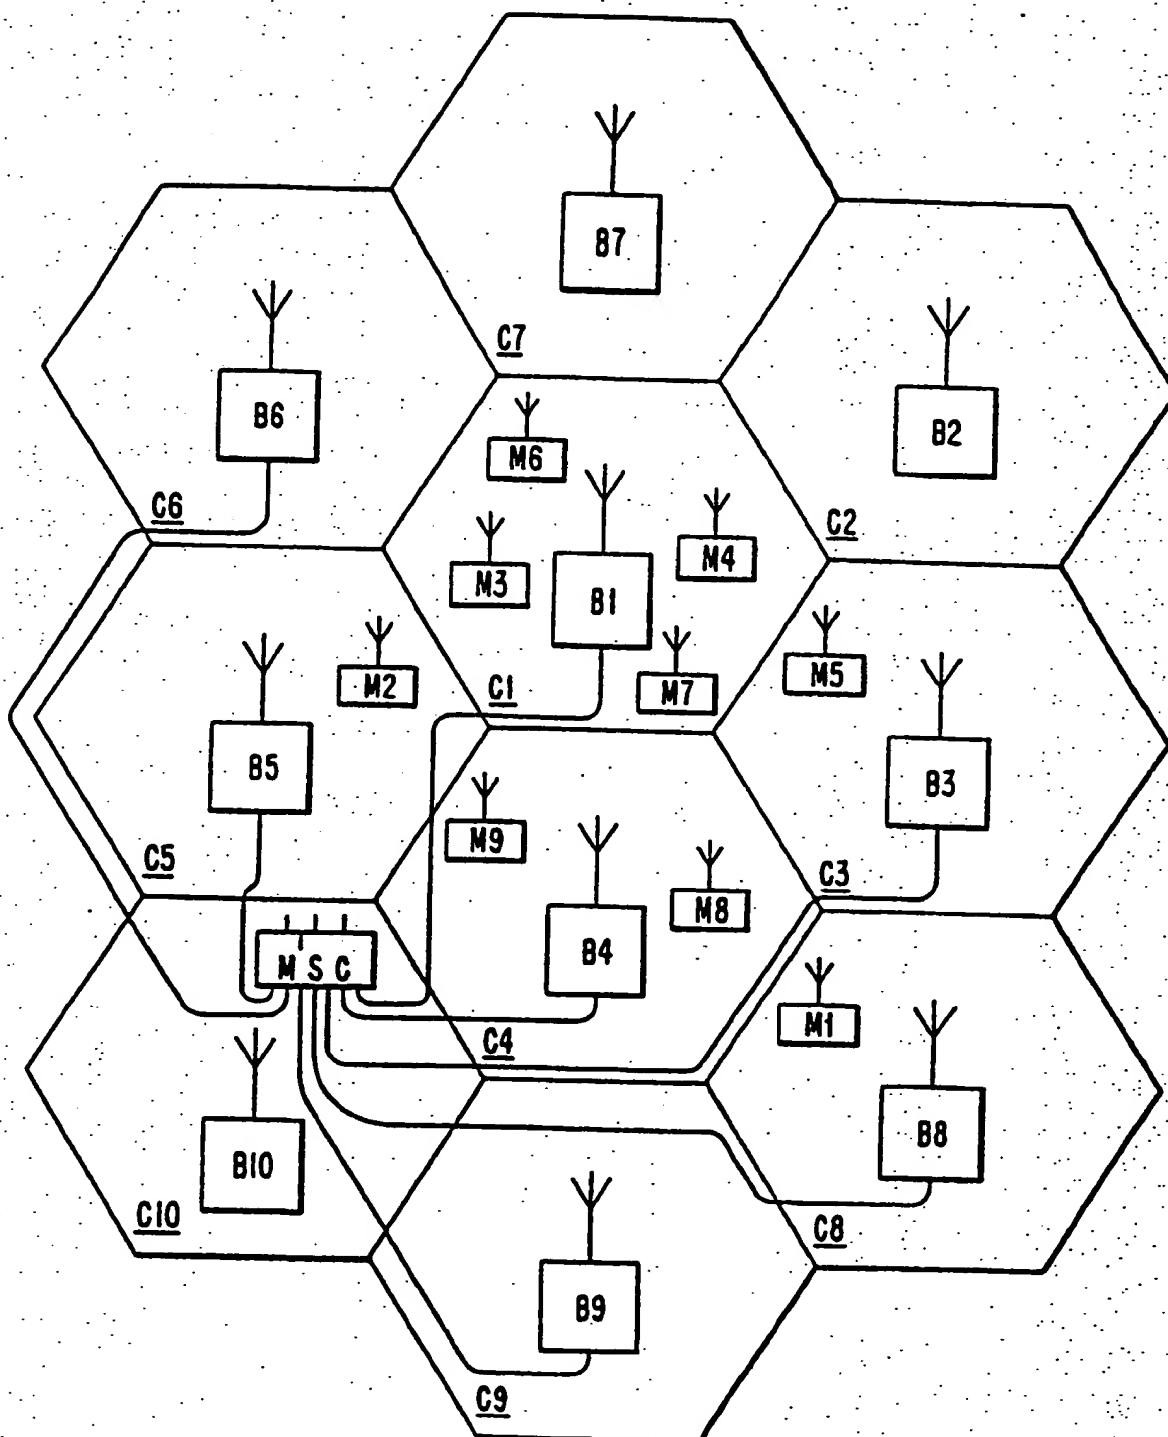



Fig. 2

PRIOR ART

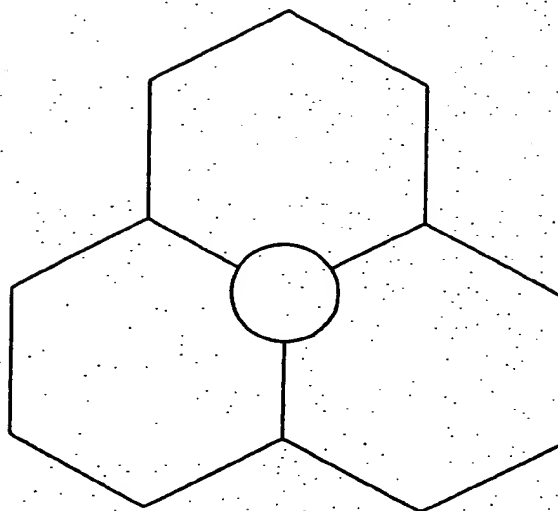

3/9

Fig. 3

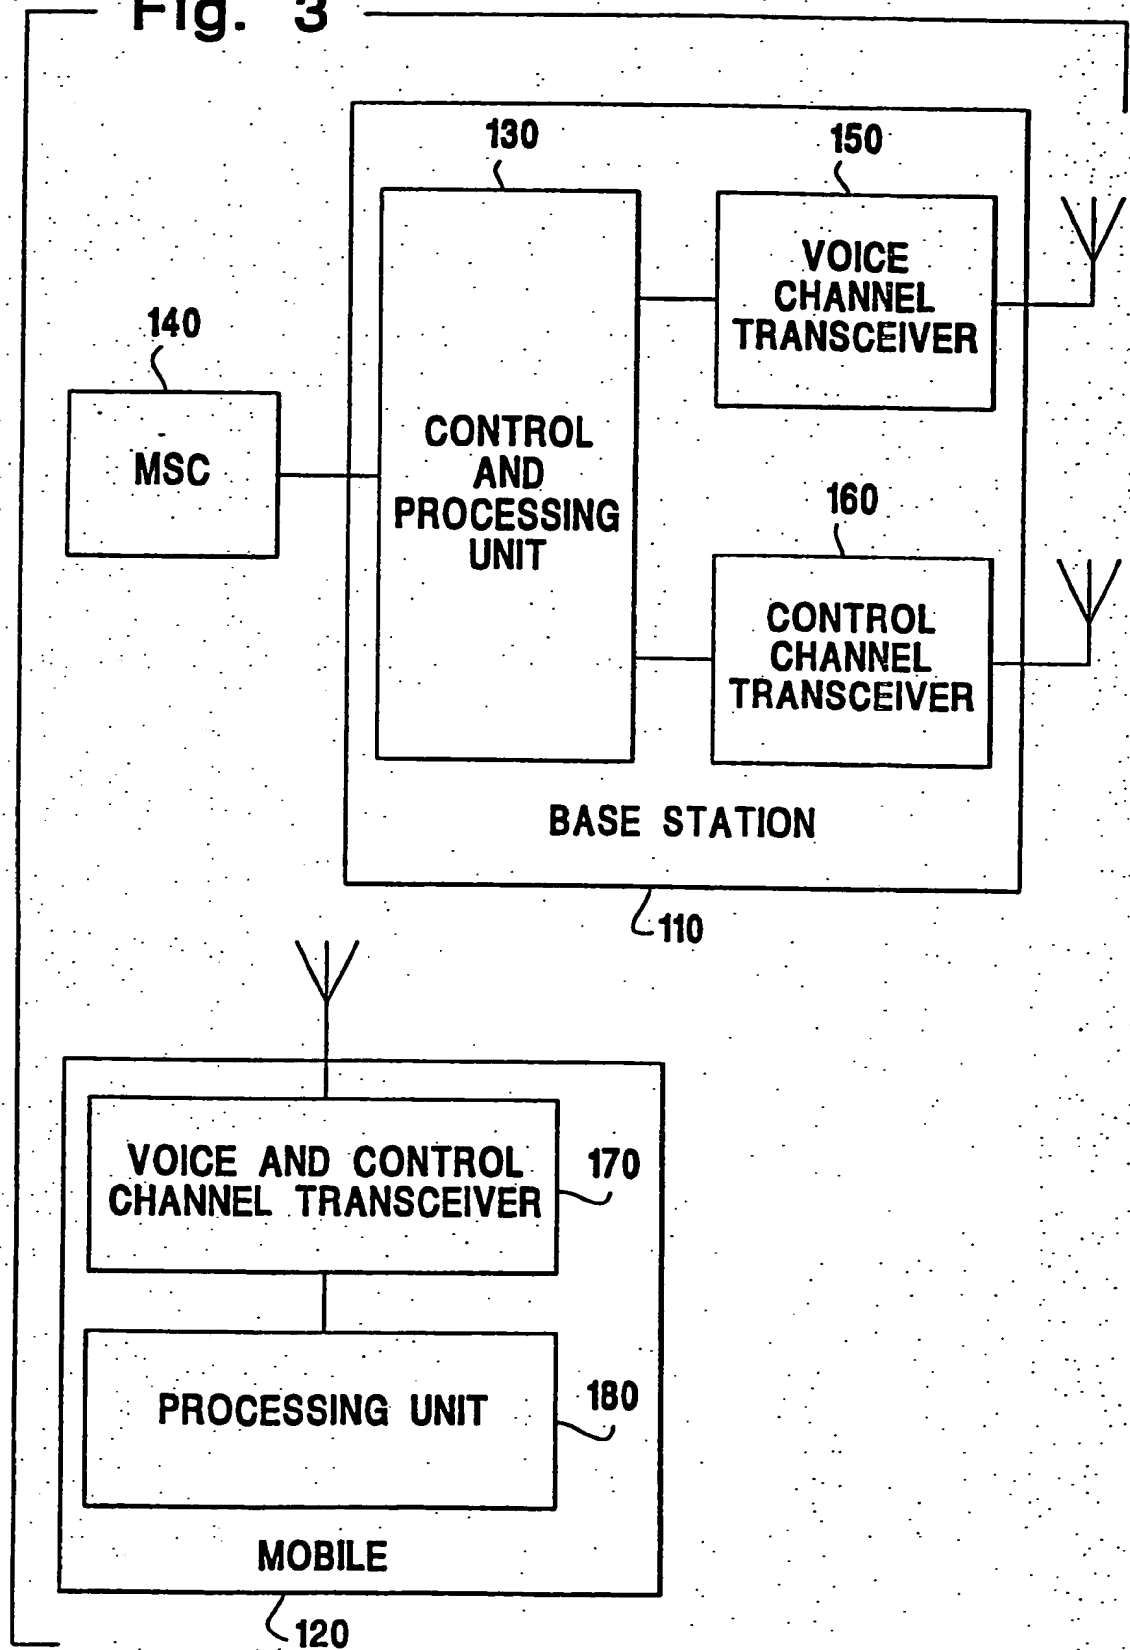

4/9

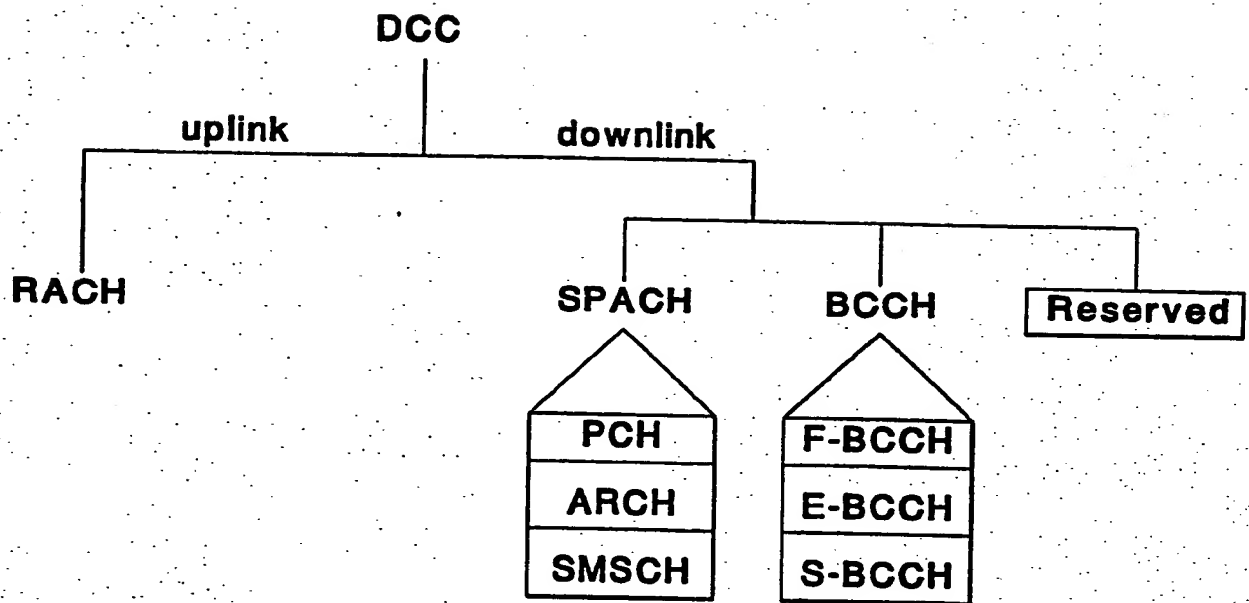


Fig. 4

5/9

BU =XXX	PCON = X	BCN = X	PFM = X	SMSN = X
------------	-------------	------------	------------	-------------

3 1 1 1 1

Fig. 5a

BT =XXX	IDT = XX	MM = X	OI = X
------------	-------------	-----------	-----------

3 2 1 1

Fig. 5b

Header A (BU=100)	Header B (BT=101)	MSID1 = X..X	PE = X..X	TID = XX	L3LH = X..X	L3DATA1 = X..X	CRC = X..X
----------------------	----------------------	-----------------	--------------	-------------	----------------	-------------------	---------------

7 7 7 2 8 16

Fig. 8

Header A (BU=100)	Header B (BT=110)	PE = X..X	TID = X..X	FRNO = X..X	L3DATA1 = X..X	CRC = X..X
----------------------	----------------------	--------------	---------------	----------------	-------------------	---------------

7 7 7 2 5 16

Fig. 9

6/9

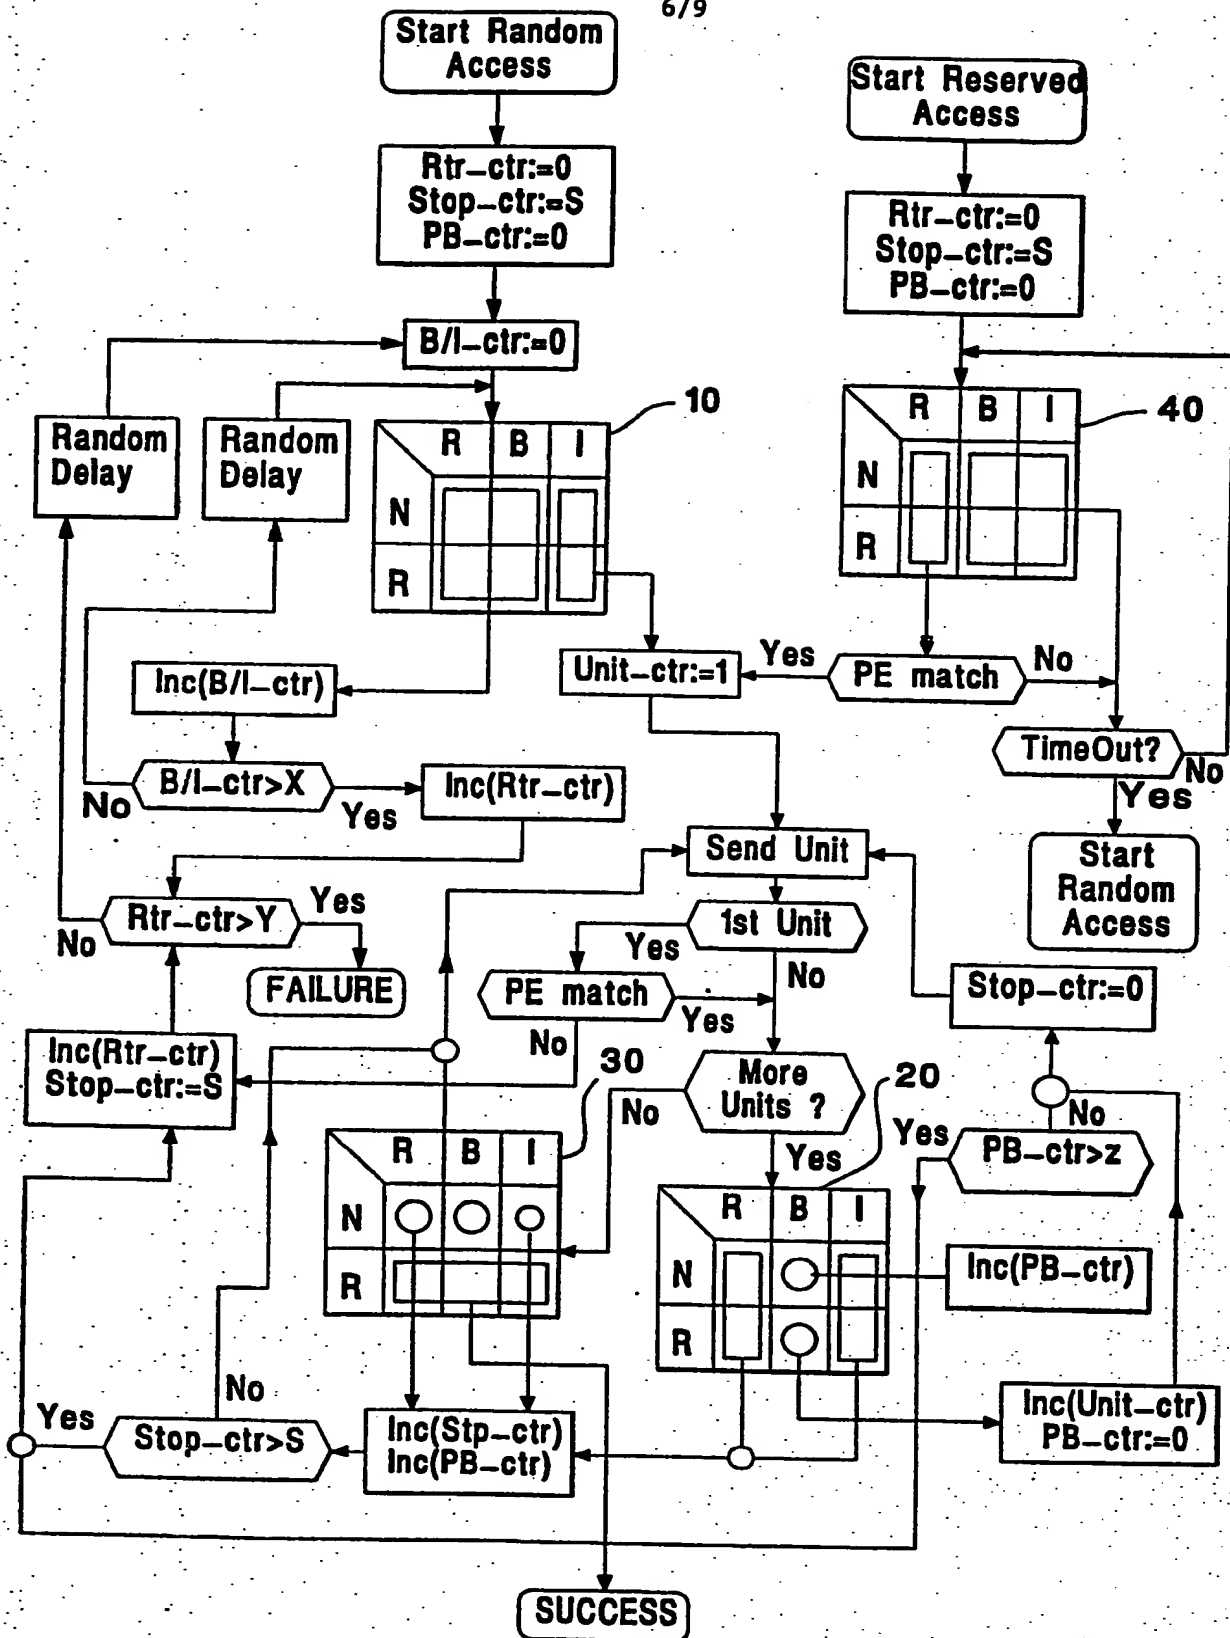


FIG. 6a

7/9

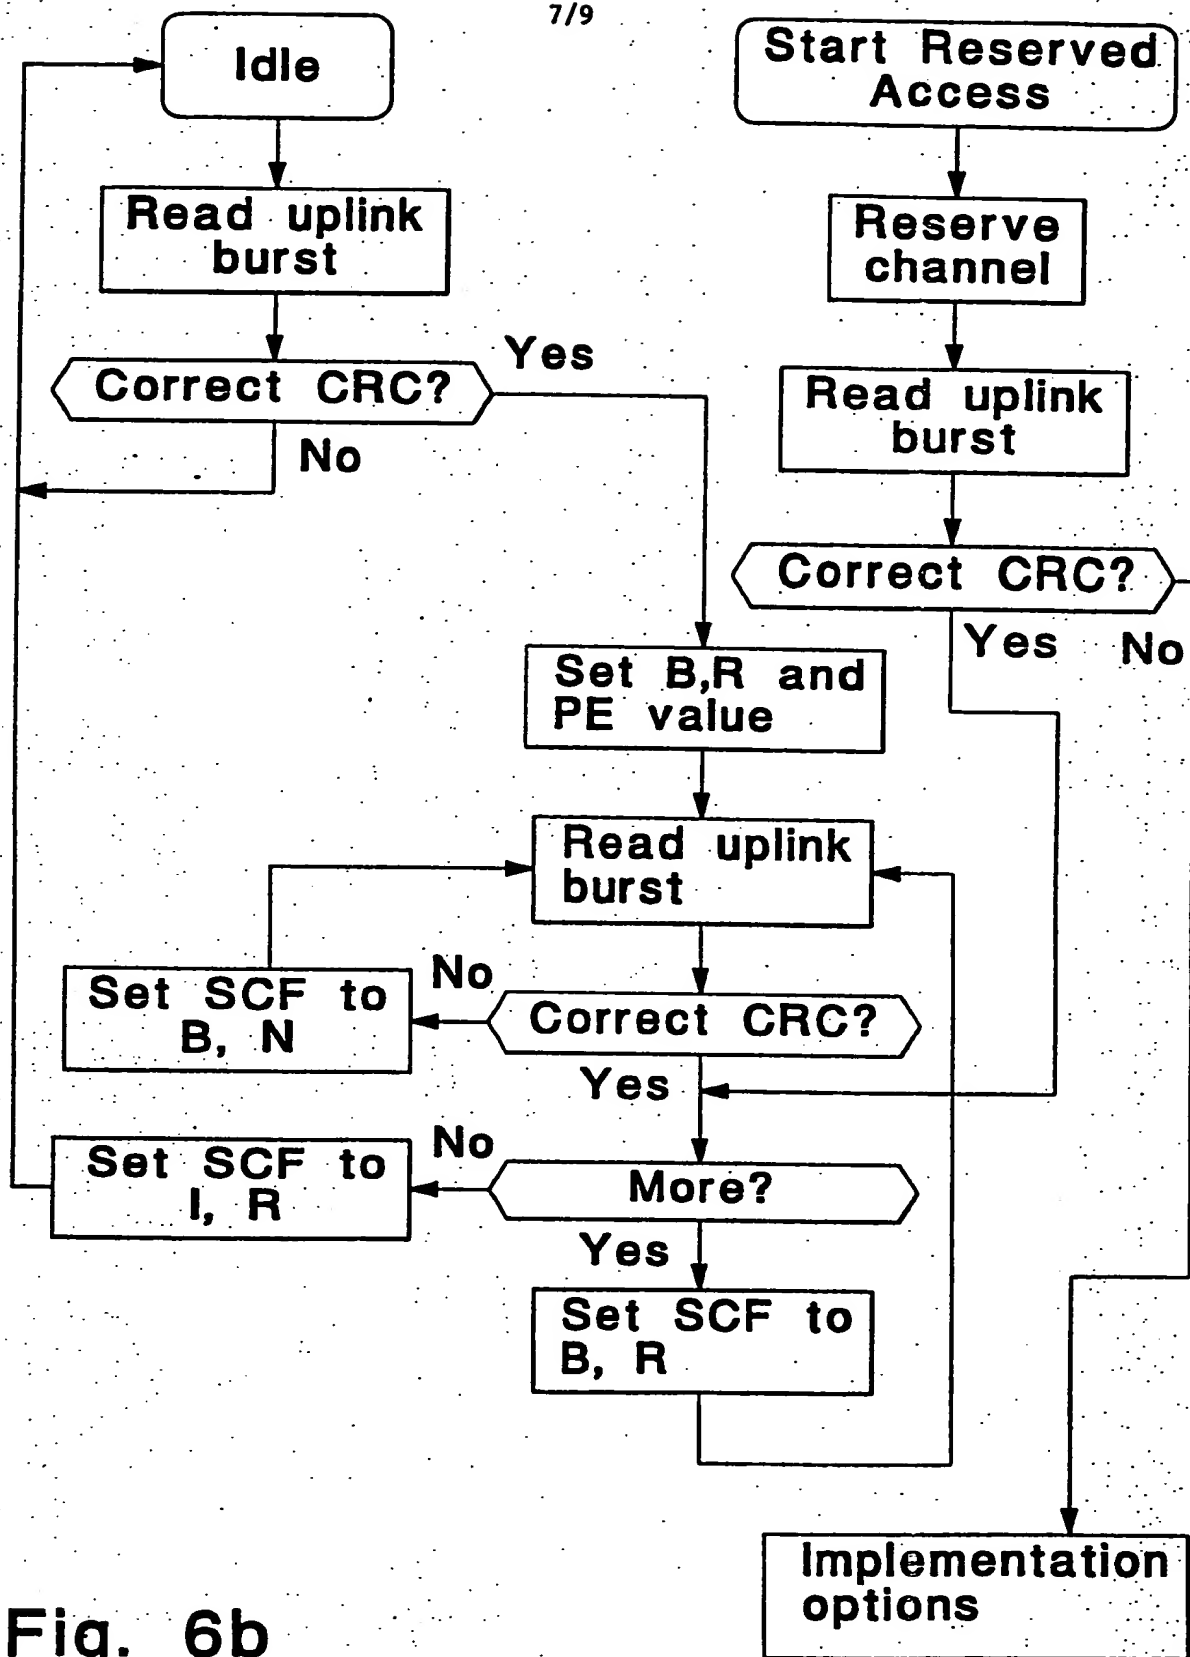


Fig. 6b

8/9

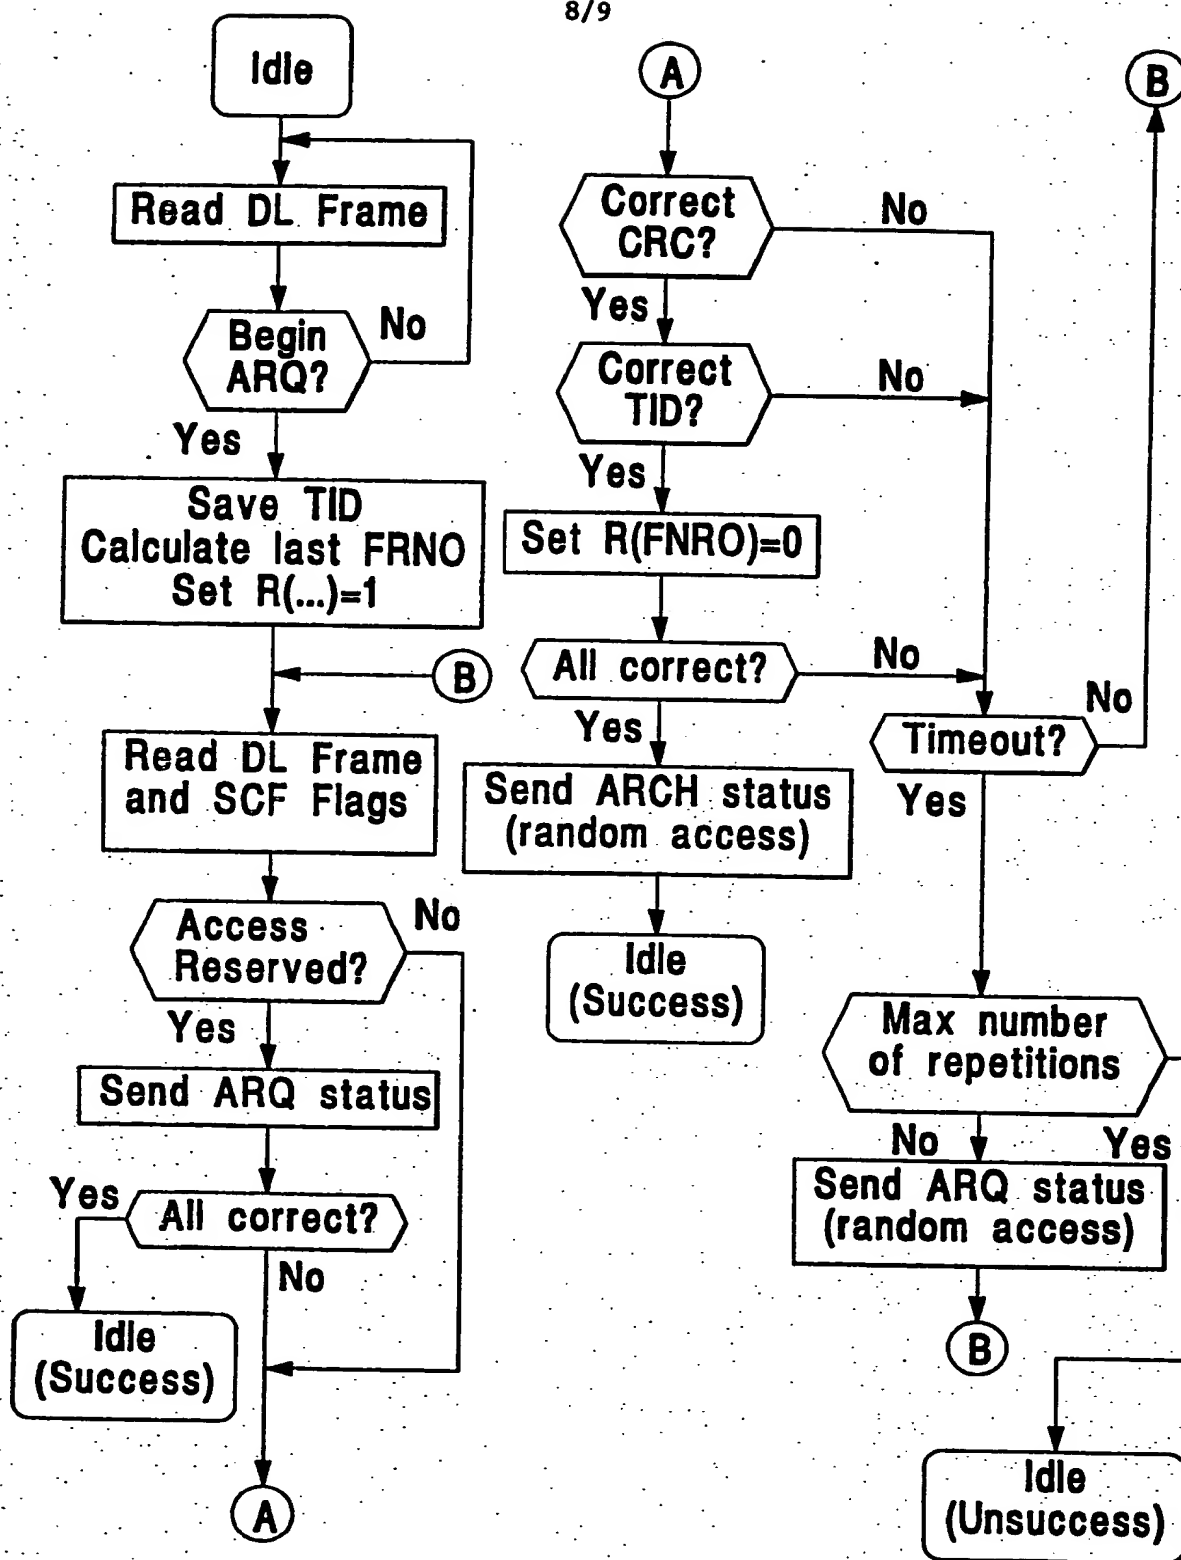


Fig. 7a

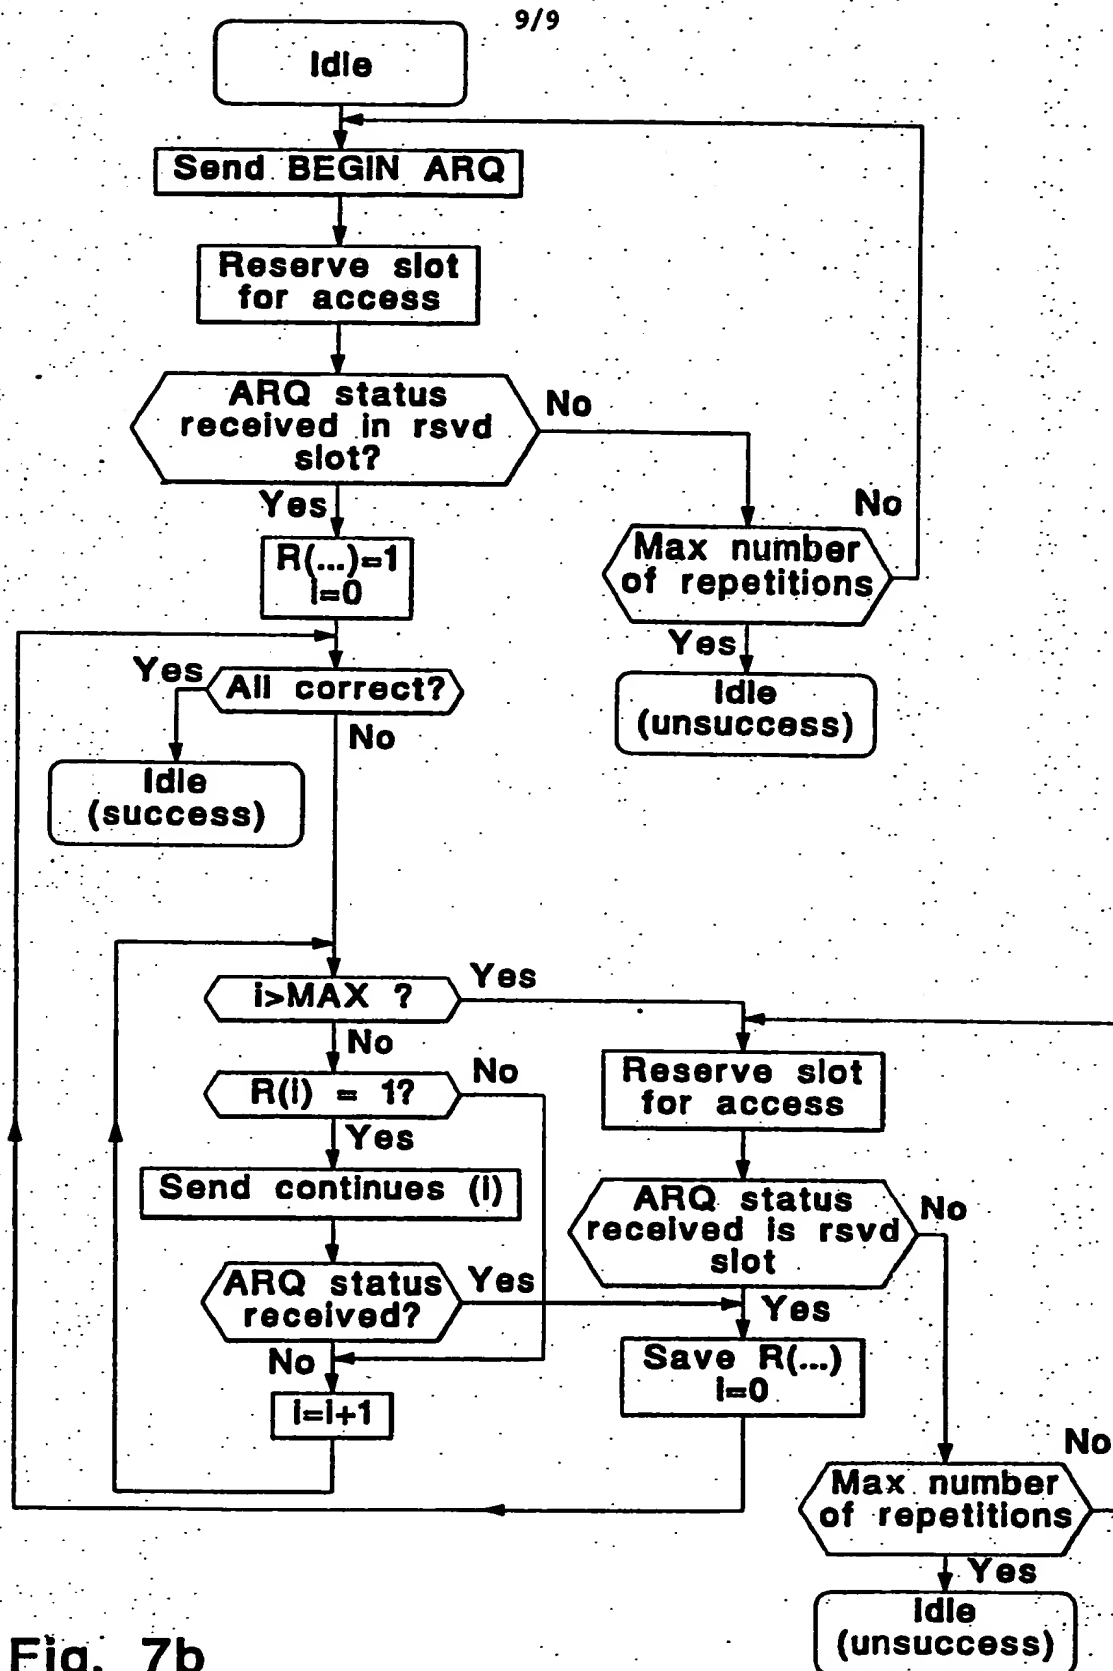


Fig. 7b

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/12618**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : H04J 3/16; H04Q 9/00

US CL : 370/95.1, 95.2, 95.3, 85.8; 340/825.08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/95.1, 95.2, 95.3, 85.8; 340/825.08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A, 5,172,375 (KOU) 15 December 1992, Fig. 4,	1 - 7, 14, 16 - 18, 20-34
X	US, A, 4,736,371 (TEJIMA ET AL) 05 April 1988, Fig. 2A AND 2B	4,5,8-13, 15,19
A	US, A, 4,940,974 (SOJKA) 10 June 1990, Fig. 5.	1-34
A	US, A 4,667,193 (COTIE ET AL) 19 May 1987, see entire reference.	1-34

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be part of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"A" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 FEBRUARY 1995

Date of mailing of the international search report

14 MAR 1995

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

AMT PATEL

Telephone No. (703) 308-5347